


ISD-SMG318LT-F

Temperature Measurement Walk-Through Detector

HIKVISION[®]

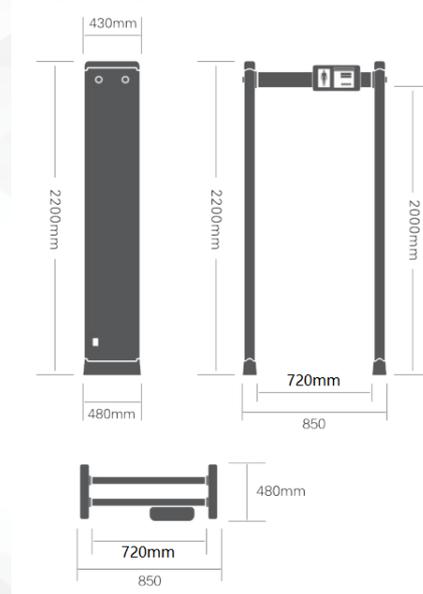

Description

ISD-SMG318LT-F walk-through metal detector, adopting the thermal imagery technology, realizes non-contact temperature measurement. Face detection function of the camera makes an accurate positioning of the measurement. The detector also supports metal detection.

It is suitable for safety inspection of dangerous goods and is widely used in public occasions and important places, etc. It is recommended to be used indoor with a windless environment.

Functions

- Non-contact temperature measurement: face temperature measurement with accurately personnel matching. Temperature accuracy: $\pm 0.5\text{ }^{\circ}\text{C}$, detection distance: 0.5 to 1.5 m, target height: 1.45 m to 1.85 m
- Temperature filtering: adjustable temperature threshold. An over-threshold temperature will trigger the audible strobe light
- Counting display: displays the walk-through people number, metal alarm times, real time temperature, number of people in abnormal temperature
- Metal detection: metal likes a clip
- Multi-Area alarm: Indicates the metal position on the body. Max. 18 areas
- Modularized component: easy transmission and installation

Thermal Imaging Features

Smart Functions:

- Temperature exception detection
- Linkage for audible alarm
- Linkage of white strobe light alarm

Thermal Imaging Functions:

- Uncooled sensor, resolution: 160 x 120
- Supports AGC4.0, DDE, and 3DNR
- Supports dual-light fusion image
- Supports visible light and thermal imaging frame over lay

System Functions:

- Dual-channel, single IP
- Dual-streaming
- PoE power supply
- IP66 protective level
- Operation temperature: 5°C to 40°C , < 95% RH

Interfaces:

- 10M/100M self-adapting network interface
- Micro SD/Micro SDHC/Micro SDXC card (128G/256G) slot
- 1-ch alarm input/output

- 15 pseudo colors: white, black , red, etc.

Visible Light Functions:

- 4 MP, 1/2.7 " CMOS, Max. resolution: 2688×1520@25fps
- Supports low bit rate, low latency and ROI
- Independent settings for day or night condition

- 1-ch audio input/output
- 1-ch 12 VDC power input

Security:

- Security verification, such as HTTPS, supports license creating
- Three level of users, IP address filtering, user and password authentication

Metal Detection Features

- Detection accuracy: metal in the size like a clip (or 1/2 clip) is detectable on the middle of the detector. Goods like Belt buckle can be excluded. Copper, aluminum, and zinc (over 150 g) , controlled knife, and gun are detectable
- Anti-interference: multiple detector can work abreast at the same time
- Multi-area alarm: Indicates the metal position on the body. Max. 18 areas
- Frequency settings: 100 frequencies can be set, and different ring tone for different frequency
- Sensitivity Settings: 255 level of sensitivity can be set
- People counting: display the number of walk-through people and people in alarm
- Positioning LED: LEDs on the sides of the detector for indicating the position of the prohibited goods.
- LCD screen
- Storing sensitivity parameters for different scenes for shortcut settings.
- Material: PVC shell

Specifications

| | | |
|-----------------|------------------------|--|
| Thermal Imaging | Sensor | Vanadium oxide uncooled sensor |
| | Max. Resolution | 160× 120 |
| | Pixel Interval | 17μm |
| | Response Waveband | 8 to 14μm |
| | NETD | ≤ 40mk(@25°C,F#=1.0) |
| | Lens (Focal Length) | 3mm |
| | MRAD | 9.44 |
| | Field of View | 50°×37.2° |
| | Min. Focusing Distance | 0.5m |
| | Aperture | 1.1 |
| | Pseudo Color | 15, white heat, black heat, fusion1, rainbow, fusion2, iron oxide red1, iron oxide red2, puce, color1, color2, ice & fire, rain, red heat, green heat, and dark blue |
| Visible Light | Sensor | 4 MP 1/2.7" Progressive Scan CMOS |
| | Resolution | 2688×1520@25fps |
| | Min. illuminance | 0.0018Lux @(F1.6,AGC ON) ,0 Lux with IR |
| | Shutter speed | 1/3s to 1/100,000s |
| | Focal length | 4mm |
| | Field angle | 84.0°×44.8° |
| | Day/Night switch | ICR |
| | WDR range | 120dB |



| | | |
|-------------------------|-----------------------------------|---|
| | IR distance | Max. 15 m |
| Image frame | Thermal imaging and visible light | Thermal imaging integrated with visible light frame |
| | Picture in picture | Supports visible light and thermal imaging frame over lay |
| | Smart information overlay | Supports (only temperature measurement rule and temperature are supported) |
| Smart function | Linkage alarm | Linkage of strobe light and audible alarm |
| Temperature measurement | Temperature exception detection | Expert mode: 10 pints, 10 frame, 21 rules on each line |
| | Body temperature measurement | AI face detection, multi-target detection |
| | Measurement range | 30 to 45°C |
| | Temperature Alarm | Alarm triggered when the temperature is over the threshold |
| | Measurement accuracy | No black body: ±0.5°C With black body: ±0.3°C |
| Compression | Video compression | H.265/H.264/MJPEG |
| | H265: | Main Profile |
| | H264: | Baseline Profile / Main Profile / High Profile |
| | Video bit rate | 32 Kbps to 8Mbps |
| | Video standard | G.711/G.722.1/G.726/MP2L2/PCM |
| | Audio bit rate | 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-192Kbps(MP2L2) |
| Storage | SD card storage | Micro SD/Micro SDHC/Micro SDXC card (128GB or 256GB) |
| | NVR storage | (96/86/77/76) I series NVR Supports live view/playback, rule display, alarm report, and remote configuration |
| Network | Main stream | Visible light: 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720) Visible light: 60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) Thermal Imaging: 25fps (160 × 120 (output 320 × 240)) |
| | Sub stream | Visible light: 50Hz: 25fps (704 × 576), 25fps (640 × 480) Visible light: 60Hz: 30fps (704 × 480), 30fps (640 × 480) Thermal Imaging: 25fps (160 × 120 (output 320 × 240)) |
| | Network protocol | IPv4/IPv6,HTTP,HTTPS,802.1x,Qos,FTP,SMTP,UPnP,SNMP,DNS,DDNS,NT P,RTSP,RTCP,RTP,TCP,UDP,IGMP,ICMP,DHCP,PPPoE,Bonjour |
| | Interface protocol | ONVIF(PROFILE S,PROFILE G),ISAPI,SDK,Ehome,GB28181 |
| | Max. live view channel number | 20 |
| | User | Three level: administrator, operator, general user |
| | Safety strategy | User and password authentication, HTTPS encryption, IEEE 802.1x control, IP address filtering |
| Interface | Alarm input | 1, 0 to 5 V alarm input |
| | Alarm output | 1, NO relay output, alarm type configurable |
| | Audio input | 1, 3.5mm Mic in/Line in interface. Line input: 2-2.4V[p-p] |
| | Audio output | 1, 600Ω |
| | Reset button | 1 |
| | Network interface | 1,RJ45 10/100M self-adaption |
| | RS-485 interface | 1 |
| | SD card slot | 1 |

| | | |
|-----------|---|--|
| | Client | iVMS-4200/HIK-CONNCT |
| | Browser | IE7+, Chrome18+, Firefox5.0+, Safari5.02+ |
| General | Power supply | 110~240VAC, 50-60Hz |
| | Consumption | <72W |
| | Operation temperature and humidity | Speed dome: 5°C to 40°C, < 95% RH Walk-through detector: -20°C to 85°C, 99%, RH |
| | Protective level | Dome camera: IP66 Walk-through detector: IP53 |
| Dimension | Detector dimension(without dome camera) | 2200 x 850 x 480mm (H x W x D) |
| | Dome camera dimension | 138.3 mm × 138.3 mm × 123.1 mm(H x W x D) |
| | Package dimension | 2270 x 700 x 230mm(H x W x D) |
| Weight | Net weight | About 50Kg |

Available Model

ISD-SMG318LT-F

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com